

Underflow

High Intensity – Rare Earth



The Eclipse Magnetics high intensity Underflow Magnet has been designed to operate in arduous conditions and where contamination size is relatively large e.g. nuts, bolts etc.

The unit incorporates two magnetic poles which generate high intensity magnetic fields. The unit is secured to the chute by a hinge and toggle clamp arrangement. The toggle clamps ensure even pressure is generated around the seal to prevent any product leakage.

The Underflow Magnet can be incorporated into any form of angled pipe or chute section. A common installation location is raw material inlet points for products such as grain, rice, corn, bran and animal feed etc. Two catchment areas ensure that attracted contamination cannot be 'washed off'.

As the magnet is usually installed in angled chute sections, any processed products of any size can be passed over the top of the magnet. Safety interlocks can be fitted to the magnet to stop the process should it be accidentally opened.

Cleaning

Underflow magnets are very easy to clean. Simply release the two securing toggle clamps and allow the magnet to swing away under its own weight, this will give access to the magnetic face.

All attracted contamination can now be removed by a gloved hand or scraper tool.

Suitable Products

Dry and semi dry powders, granulates and lumps etc.

Suitable Locations

All angled chute sections.

Benefits

- Easy to clean
- Maintains full flow
- High collection capacity
- Reduces 'spark' risk
- Removes 'tramp' sized contaminants
- Meet audit requirements
- Rare earth deep magnetic field

Category



Primary protection - tramp.



Technical Data

Product Information

Part Number	A mm	Weight kg
UFM200	200	10
UFM250	250	13
UFM300	300	15
UFM350	350	17
UFM400	400	20
UFM450	450	23
UFM500	500	27

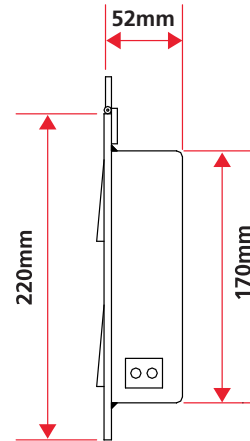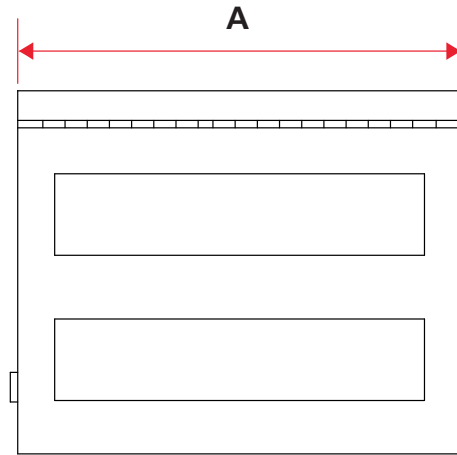

Performance

Magnetic performance

3,500 Gauss

Performance reading

On magnetic front face surface

Magnetic material

Rare earth neodymium iron boron

Magnet grade

N35 – Inspected and confirmed via hystorograph prior to use

Temperature

-20°C / +90°C

Materials

Housing

304 grade stainless steel

Other parts

304 grade stainless steel

Surface finish

Brushed finish

Hinge

304 grade stainless steel

Toggle clamps

Zinc plated mild steel

Options

- High temperature samarium cobalt magnetic material, +250°C
- Sizes up to 2000mm long
- 304 grade stainless steel
- ATEX certified
- Rare Earth magnetic material
- Pharmaceutical specification
- Stainless steel toggle clamps

If you have any more questions, require technical assistance or would like a quotation, please contact us.

www.eclipsemagnetics.com

Eclipse Magnetics Ltd, Atlas Way, Sheffield, S4 7QQ, England

T +44 (0)114 225 0600 F +44 (0)114 225 0610 E info@eclipsemagnetics.com W www.eclipsemagnetics.com

While every effort has been made to ensure the accuracy of the information in this publication please note that specifications may change without notice.

