


# Permanent Plate Magnet

High Intensity – Rare Earth

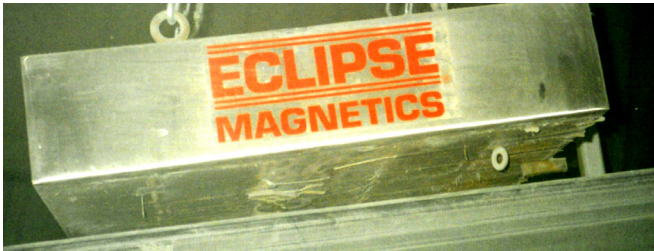

Permanent Plate Magnets are used in recycling, quarrying and heavy industries.

These units can be placed above flat or trough type conveyors. Large permanent magnetic packs generate deep penetrating magnetic flux fields that attract and remove 'tramp' type steel items.

This unit is considerably less expensive than electro-magnetic units and, as it has no running costs other than cleaning, much cheaper to run.

When considering installation points it should be noted that steel belt support rollers will need to be changed to non-magnetic ones due to possible flux field absorption. For heavily contaminated materials consider the self cleaning Permanent Magnetic Overband (datasheet 605).



## Cleaning

The magnetism cannot be switched off so cleaning has to be done manually using either a scraper tool or gloved hand.

To aid cleaning, plate magnets can be supplied with a sliding cleaning plate.

## Suitable Products

All conveyable products, wood chip, biomass, recyclables, aggregates, coal etc.

## Suitable Locations

Above transfer conveyors, vibratory feeder outlets etc.

## Benefits

- Allows difficult products to be screened
- High volume capacity
- Designed for 24 / 7 operation
- Removes large to medium sized contamination


## Category

Primary protection - tramp.

# Technical Data

## Product Information

Part Number	Length A mm	Width B mm	Depth C mm	Thread	Weight kg
<b>100 Series</b>					
PM3020	300	200	100	M12	40
PM4020	400	200	100	M12	50
PM5020	500	200	100	M12	65
PM6020	600	200	100	M12	85
PM7020	700	200	100	M12	95
PM8020	800	200	100	M12	105
PM9020	900	200	100	M12	120
PM10020	1000	200	100	M12	135
<b>200 Series</b>					
PM4040	400	400	200	M16	220
PM5040	500	400	200	M16	265
PM6040	600	400	200	M16	320
PM7040	700	400	200	M16	370
PM8040	800	400	200	M16	420
PM9040	900	400	200	M16	470
PM10040	1000	400	200	M16	530
<b>300 Series</b>					
PM6080	600	800	300	M20	730
PM7080	700	800	300	M20	850
PM8080	800	800	300	M20	970
PM9080	900	800	300	M20	1100
PM10080	1000	800	300	M20	1200
PM12580	1250	800	300	M20	1450

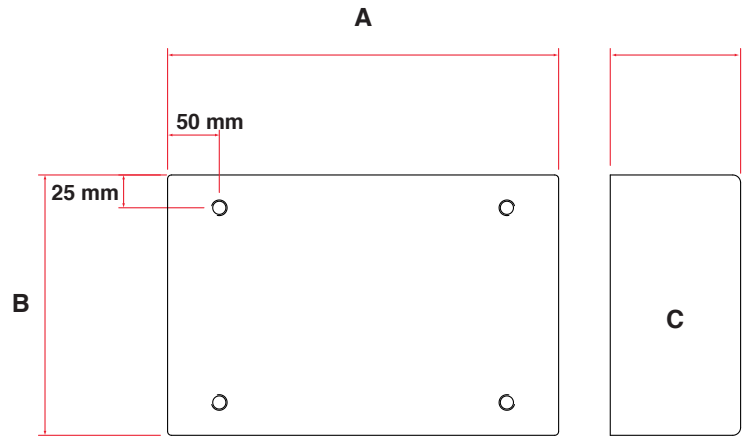

## Performance

**Magnetic material**

**Magnetic field depth**

Ceramic strontium ferrite

100 Series = 100mm\*;

200 Series = 200mm\*;

300 Series = 300mm\*

**Temperature**

-40°C / +80°C

\*Mild steel test piece 5mm Ø × 25mm long

## Materials

**Cover**

304 grade stainless steel

**Back plate**

Painted mild steel

**Lifting points**

Four threaded holes

## Options

- Sliding cleaning plate
- Full stainless steel cover
- Forged lifting eyes
- Protective paint coating

If you have any more questions, require technical assistance or would like a quotation, please contact us.

[www.eclipsemagnetics.com](http://www.eclipsemagnetics.com)

Eclipse Magnetics Ltd, Atlas Way, Sheffield, S4 7QQ, England

T +44 (0)114 225 0600 F +44 (0)114 225 0610 E [info@eclipsemagnetics.com](mailto:info@eclipsemagnetics.com) W [www.eclipsemagnetics.com](http://www.eclipsemagnetics.com)

While every effort has been made to ensure the accuracy of the information in this publication please note that specifications may change without notice.